



3/19

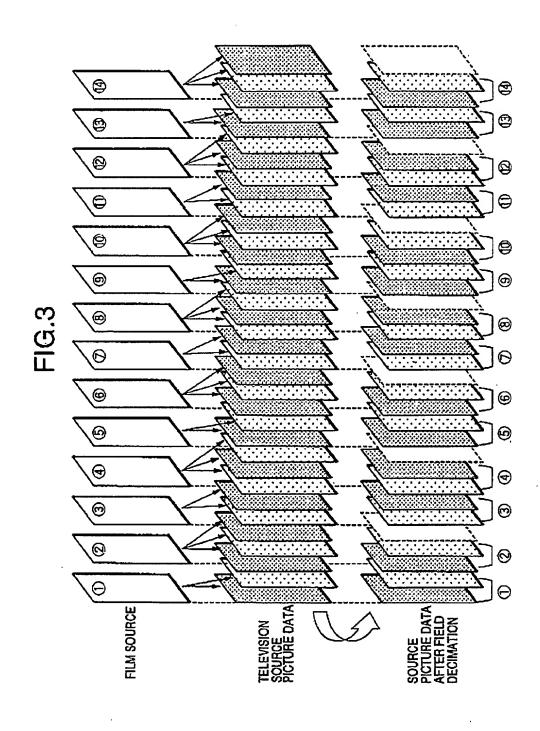

→ HIGH FREQUENCY FREQUENCY COEFFICIENT AFTER DCT CONVERSION HORIZONTAL PEL ARRAY HIGH FREQUENCY DC COMPONENT, SOURCE PICTURE AFTER BLOCK SCAN CONVERSION HORIZONTAL PEL ARRAY (8 PELS)


HIGH FREQUENCY AC COMPONENT

5/19

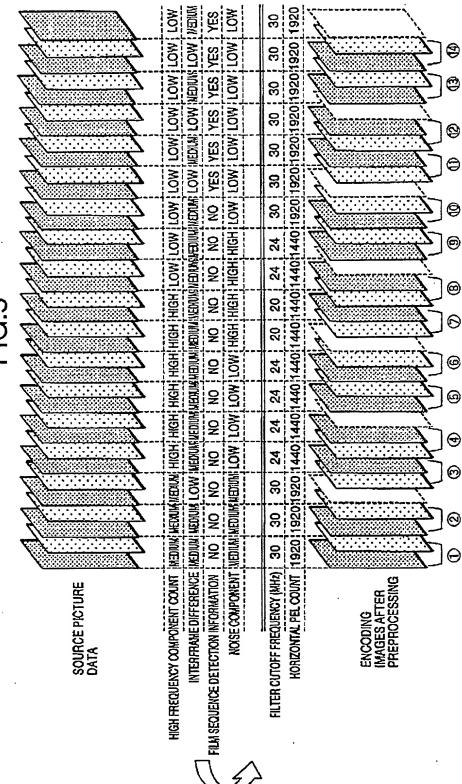



74/ 88




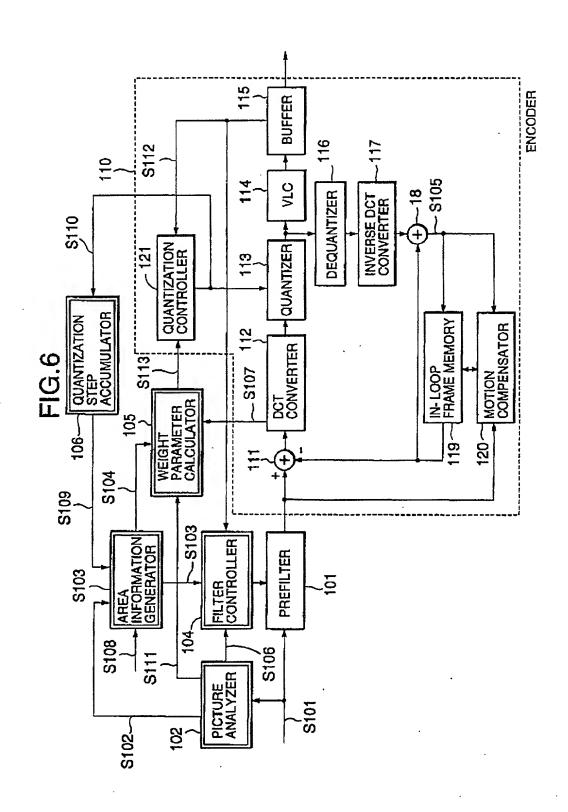


7/19

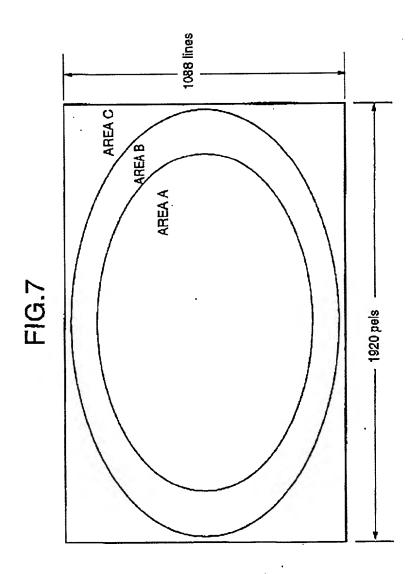

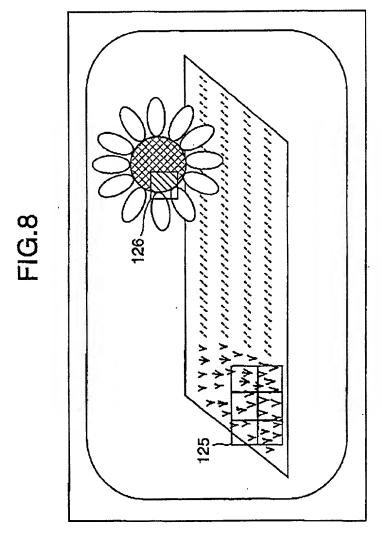


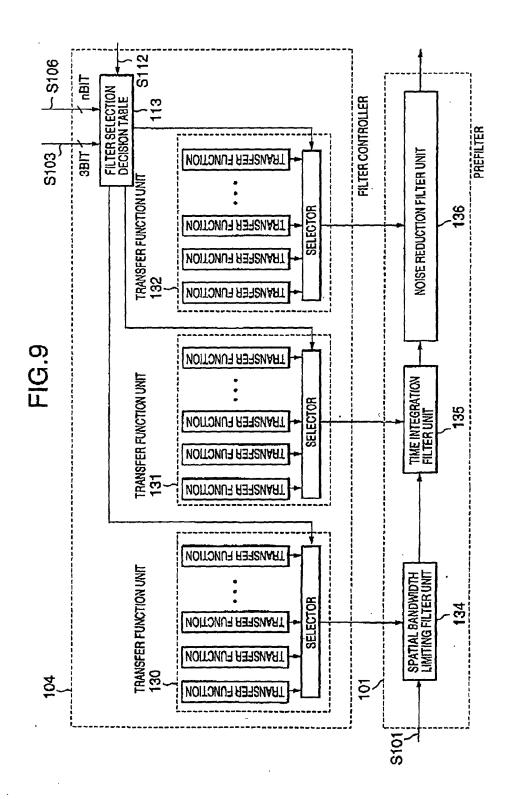

10/19

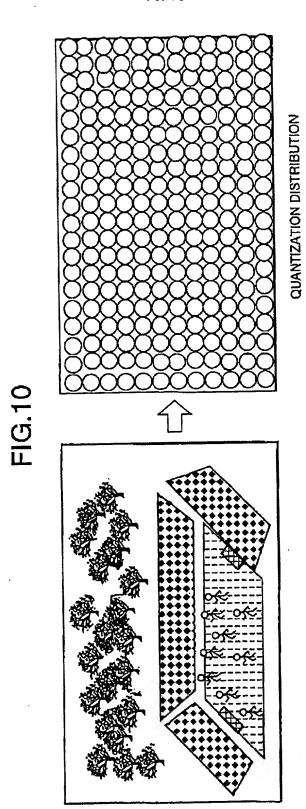

11/19

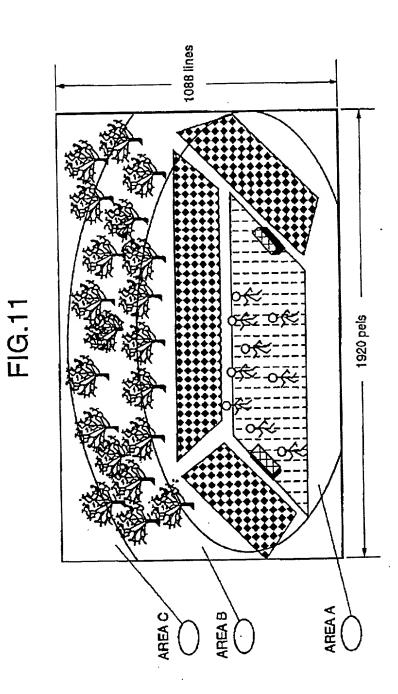





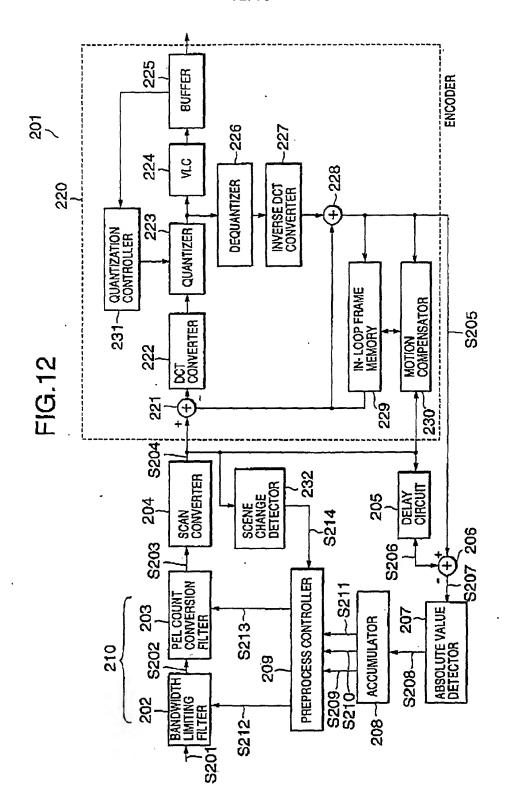


FIG.13

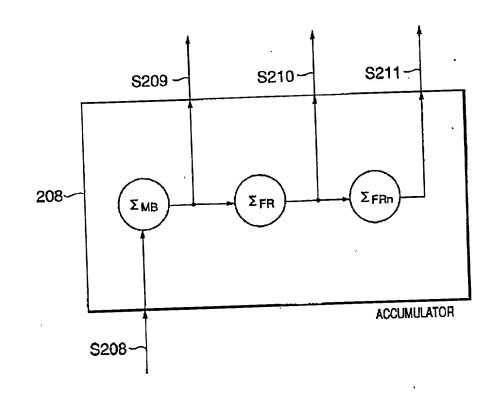


14/19

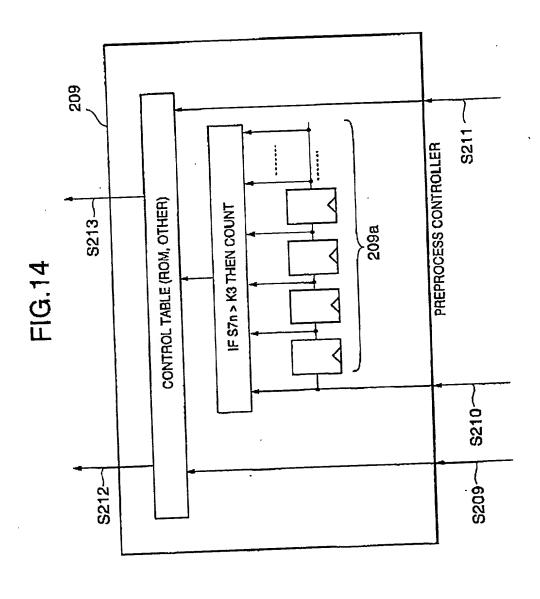


REFLECT IN BANDWIDTH LIMITING FILTER OR PEL COUNT CONVERSION FILTER (3a) FIG. 15 SZ10 OR SZ1 IDENTICAL TO SIGNAL OF TOP ROW ACCUMULATOR OUTPUTS \$209 TO \$211 **DELAYED DATA S206** SOURCE PICTURE DATA S201 LOCALLY DECODED DATA S205 SOURCE PICTURE DATA S201 PREPROCESS CONTROLLER 209


FIG.16

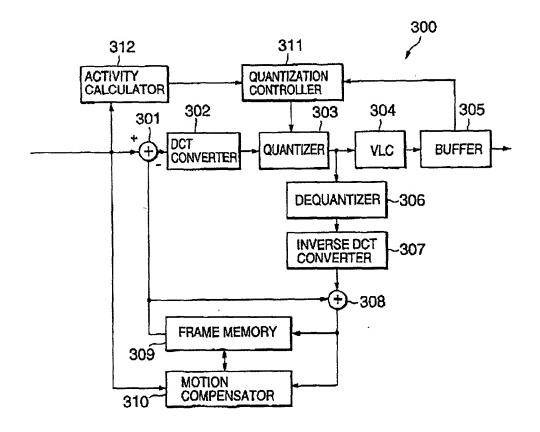

17/19

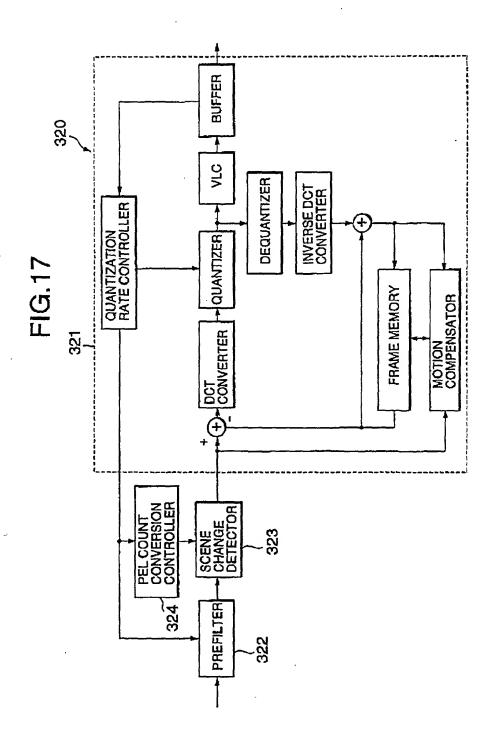

18/19

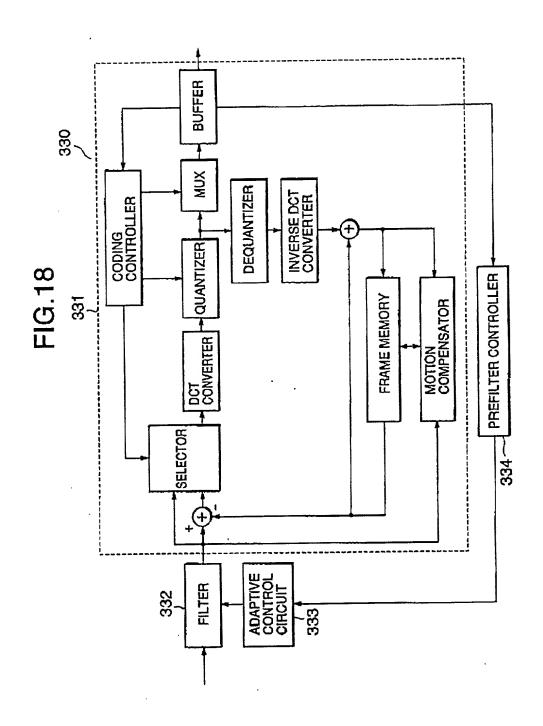

19/19

